

## MYR linkage a-frame loading arm – E2123



5 year limited warranty on D2000 World Series swivel joints.

MYR linkage allows for effortless handling of the outboard section of the loading arm while maintaining a constant height.

Standard vertical range of motion for the loading arm is 90° (park position) to 45° (load position).


Not recommended where multiple arm cross-over is required.

Standard arms feature the D2000 World Series swivel joints for ultra low maintenance & the easy to adjust spring balance.

- Pipe size: 2" through 4"
- Materials: Carbon, Steel carbon, Steel/Aluminum, Stainless steel


### Riser connection options

Loading arms shown in the park position

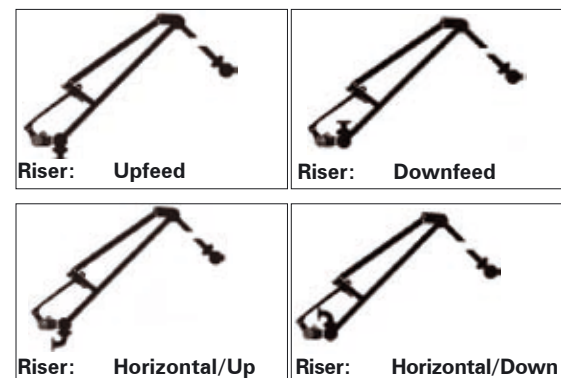

E2123

Dimensions and technical data

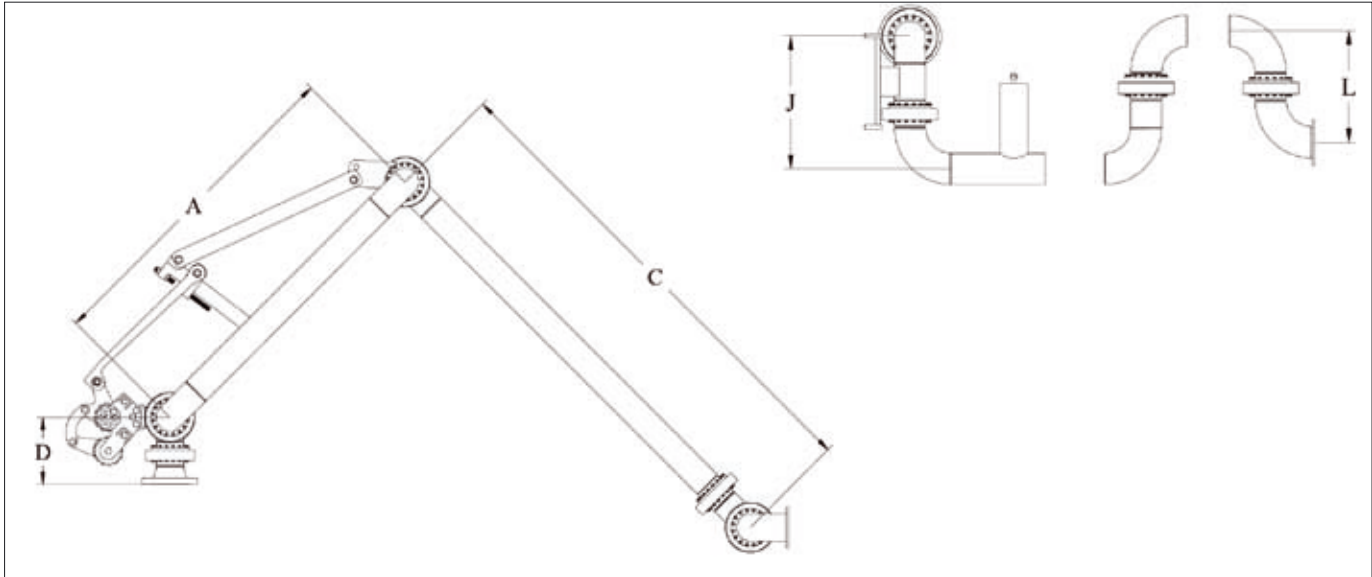

**EMCO WHEATON**  
*A Gardner Denver Product*

Whilst the content of this leaflet has been edited with the greatest care, we are not liable for any errors and/or omissions. Subject to change without notice.

EMCO WHEATON USA INC  
9111 Jackrabbit Road · Houston, Texas 77095 · USA  
Phone +1 281 856-1300 · Fax +1 281 856-1325  
[www.emcowheaton.com](http://www.emcowheaton.com) · [sales-us@emcowheaton.com](mailto:sales-us@emcowheaton.com)