




# Oceanographic Flag Blocks

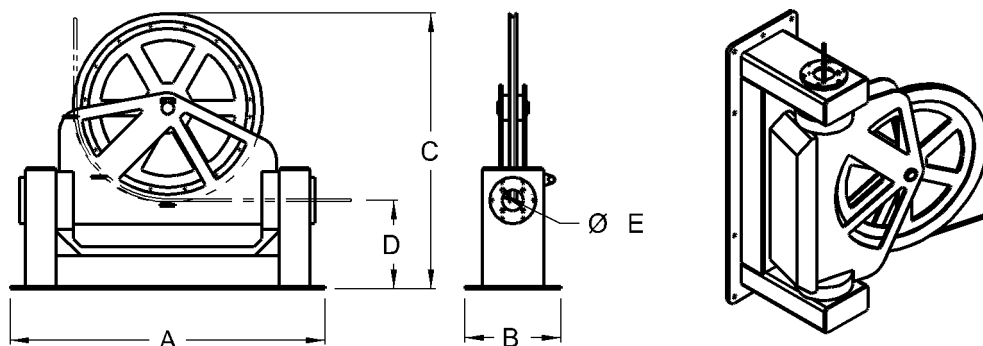

<i>Model Number</i>	<i>Units of Measure</i>	<i>Maximum Wire Size</i>	<i>Wire Breaking Strength</i>	<i>Sheave Tread Diameter</i>	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	<i>Weight</i>
420	Inches	3/8"	14,800 lbs	19- 5/8	54- 3/4	20	35- 1/2	14- 7/8	5- 1/2	1725 lbs
	MM	19	66 kN	498	1391	508	902	378	140	782 Kg
448	Inches	3/4"	57,000 lbs	47- 1/4	78	25	71- 3/4	23- 1/8	5- 1/2	3025 lbs
	MM	25	254 kN	1200	1981	635	1822	587	140	1372 Kg

## ***Standard Features***

- Designed for breaking strength of wire with 95° wrap on sheave
- Nylatron sheaves are ideal for use with wire rope, electro-mechanical or fiber optic cables
- Sealed grease lubricated Timken tapered roller bearings
- Wide throat allows for passage of wire end fittings and connectors
- Counterweighted for smooth operation
- Replaceable sheave rim segments for different wire sizes

## ***Optional Features***

- Steel sheaves
- Third party certification
- Other sizes available
- Paint to your specification
- Load monitoring system

***We will custom engineer any of our products to suit YOUR requirements!***

7915 10th Ave. S., Seattle, WA 98108 USA - Tel: 206-764-4650 - Fax: 206-764-4653 - Website: [www.SmithBerger.com](http://www.SmithBerger.com)