

**POLYSLICK™**  
**MARINE**



Ultra High Molecular Weight Polyethylene Fendering

**APPLICATIONS**

Dock Facings

Bridge Fenders

Boat Rails and Gunnels

Canal Lock Door Panels

Lock and Dam Guidewall

Dry Dock Walls and Side Rails

Pile Facings

Gate Fenders

Floating Docks

Pipeline Fenders

Wharf, Pier and Lock Fenders

Offshore Pump Station Fenders

Rub Rails

Sliding Pads

Pier Protection


Guide Rollers

Canal Lock Walls

Keel and Bilge Block Facings



Fender Pads

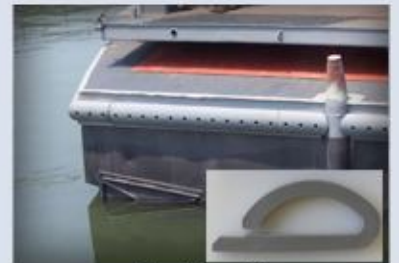

Flexi Fend®

U.S. Patent Nos. 6,832,570 /  
6,948,440 / 7,624,694 / 8,029,209



Pileguard



## POLYSLICK™ MARINE



### UHMW-PE DOCK FENDERS AND FENDER PADS

#### FEATURES

Impact resistant  
Abrasion resistant  
UV protected  
Will not corrode, rot or splinter

Resists marine borers and barnacle growth  
Non-sparking  
Can be drilled, chamfered and fabricated to meet customer specifications

#### COLORS

Black Yellow  
Custom Colors

#### SIZES

Thickness inch / mm  
0.125 to 10 / 3 to 250

### UHMW-PE FLEXI FEND®

#### FEATURES

Non-marking  
Non-grabbing  
Absorbs energy  
Impervious to salt water and oil  
Leaf shape allows it to flex with impact and return to shape with no permanent damage

High visibility  
Easy installation  
Eliminates paint or tape  
Will not corrode, rot or splinter  
US patent nos. 6,832,570 / 6,948,440 / 7,624,694 / 8,029,209

#### COLORS

Black Gray  
Custom Colors

#### SIZES

|           | inch / mm                          | inch / mm                         |
|-----------|------------------------------------|-----------------------------------|
| T x H x W | 0.25 x 4 x 2.13 / 6 x 100 x 53     | 0.5 x 10 x 4.2 / 12 x 250 x 105   |
|           | 0.375 x 4 x 2.13 / 9.5 x 100 x 53  | 0.625 x 10 x 4.2 / 15 x 250 x 105 |
|           | 0.375 x 10 x 4.2 / 9.5 x 250 x 105 | 1 x 10 x 4.2 / 25 x 250 x 105     |



### UHMW-PE PILEGUARDS

#### FEATURES

Impact resistant  
Abrasion resistant  
UV protected  
Will not corrode, rot or splinter

Resists marine borers and barnacle growth  
Non-sparking  
Can be drilled, chamfered and fabricated to meet customer specifications

#### COLORS

Black Yellow  
Custom Colors

#### SIZES

Thickness inch / mm  
1.25 / 32  
Width x Length 12 x Up to 30 feet / 300 x Up to 9 meters

### UHMW-PE CUSTOM FENDERS

Fenders can be fabricated, heat or cold formed to customer specifications.  
Custom colors and formulations available.

Distributed by:

**Headquarters:**  
PO Box 32; 10526 Al Hwy 40  
Henagar, AL 35978 USA  
Ph: (256) 657-5197  
Fax: (256) 657-5189  
Toll Free: (877) 489-0039

**Ultrapoly Division:**  
2404 Center Street  
Tacoma, WA 98409 USA  
Ph: (253) 272-1217  
Fax: (253) 272-1457  
Toll Free: (800) 872-8469

**West Coast Distribution:**  
4419 West 1980 South  
Salt Lake City, UT 84104 USA  
Ph: (801) 363-3109  
Fax: (801) 364-4381  
Toll Free: (800) 220-7004

**Asia Pacific:**  
Plot No.'s 160 c/o & 161 c/o  
Cherlapally Ida Phase II  
HCL Post Office  
Hyderabad - 500 051 India  
Ph: 91 40 2726 3375  
Fax: 91 40 2726 1219

**Avalanche Liner Division:**  
3273 West 5th Court  
Oxford, WI 53952 USA  
Ph: (608) 586-5100  
Fax: (608) 586-5175  
Toll Free: (877) 522-2382

POLYMER INDUSTRIES